


## Crocodile clips

### MA 1 Crimp

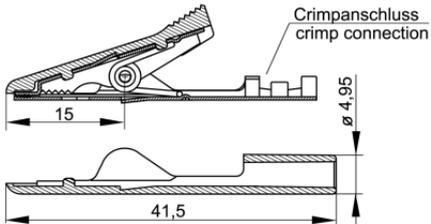

Product	MA 1 Crimp
description	Miniature alligator clip with high strength insulation and nickel-plated brass / bronze jaws. The flat part of the chuck jaws (fine wire section) allows a secure contacting, when thin wires be pinched. It is possible to clamp of flat components (soldering eyes) and wires up to a maximum diameter of 4mm. Crimp connection for 0,25mm <sup>2</sup> up to 0,5mm <sup>2</sup> wiring, with following assembly of the bottom insulating part (shim). With suitable tool to crimp (for example with TE use 539680 - 2).
operating instruction	BA210
article-no. / *colour	9303181xx  00 black    01 red    02 blue    03 yellow    04 green    06 gray    07 white <div style="text-align: right; border: 1px solid black; padding: 2px;"><b>Ni</b></div>
drawing	
technical data	
connection	Crimp terminal 0.25 mm <sup>2</sup> up to 0.5 mm <sup>2</sup>
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(2)</sup>
rated current (consider derating curve)	8 A
material socket	bronze, nickel plated
housing material	PP
temperature range acc. To IEC61010 <sup>(1)</sup>	-25 °C to +100 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

2 mm system

clamping range	4 mm
----------------	------

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(2)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 21.06.2022

stand: 21.06.2022