





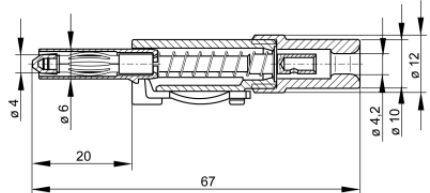


## Plugs

### SLS 10 B



Product	SLS 10 B
description	Touch protected plug to assemble with solder connection for cables up to 2.5mm <sup>2</sup> . Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring. plug with contact spring, 4mm diameter.
operating instruction	BA414
article-no. / *colour	9318241xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> <div style="text-align: center;">  02 blue </div> <div style="text-align: center;">  03 yellow </div> <div style="text-align: center;">  04 green </div> <div style="text-align: center;">  07 white </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Ni</div>
drawing	
	
technical data	
connection	solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(2)</sup>
rated current (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	POM
temperature range acc. To IEC61010 <sup>(1)</sup>	-25 °C to +80 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	HB

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(2)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 21.06.2022

stand: 21.06.2022