


## Measuring leads

### PL 2600 SIL S W

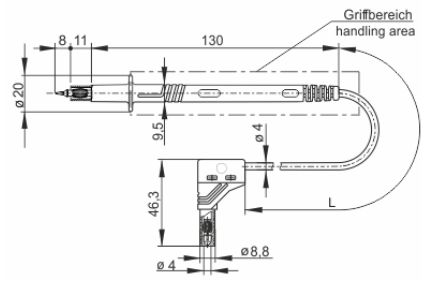

| Product                                                                        | PL 2600 SIL S W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| description                                                                    | Touch-safe silicone test lead with dual function safety test probe. Tip for penetration of oxide layers and pin Ø4mm for insertion in sockets. Highly flexible, double insulated stranded lead, soldering iron resistant. Safety plug Ø 4mm with angled outlet and integrated bend protection.                                                                                                                                                                                                       |
| operating instruction                                                          | BA452                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| article-no. /<br>*colour                                                       | 9342581xx<br><br><div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <br/>00<br/>black </div> <div style="text-align: center;"> <br/>01<br/>red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: fit-content;">Ni</div> |
| drawing                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                  |
| technical data                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| rated voltage                                                                  | AC/DC 1000 V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| measurement cat. acc. to IEC 61010                                             | CAT II                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| rated current<br>(consider derating curve)                                     | 16 A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| material plug                                                                  | brass, nickel plated                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| housing material                                                               | PA, PP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| temperature range acc. To IEC61010 <sup>(1)</sup>                              | -15 °C to 70 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| flammability class acc. to UL 94<br>(only valid for basic material of housing) | HB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| cable length                                                                   | 100 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

4 mm safety system

|                |                   |
|----------------|-------------------|
| conductor size | 1 mm <sup>2</sup> |
| cable material | SIL               |

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges  
stand: 21.06.2022

stand: 21.06.2022