





## Clamp-type test probe

### KLEPS 60



Product	KLEPS 60
description	Clamp-type test probe grip jaws and flexible shaft. The special form of the grip jaws permits clamping of pins and wires up to a maximum of 4 mm diameter. 4 mm diameter brass socket connection with additional screw connection, grip jaws additionally tin-plated.
operating instruction	BA408
article-no. / *colour	9730531xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black         </div> <div style="text-align: center;">  01 red         </div> </div>
drawing	
technical data	
connection	4 mm socket (unsprung) screw terminal
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(2)</sup>
rated current (consider derating curve)	4 A
material socket	brass
housing material	PP, PS
temperature range acc. To IEC61010 <sup>(1)</sup>	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	HB
clamp type	grip jaws, tin plated

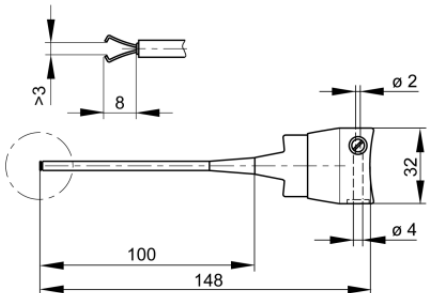4 mm system

clamping range	4 mm
----------------	------

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(2)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 21.06.2022

stand: 21.06.2022