





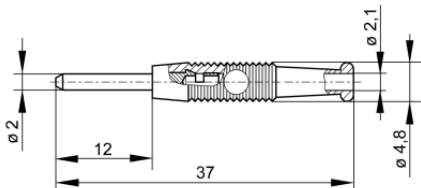


## Plugs

### MST 3



Product	MST 3
description	2 mm diameter miniature connector, nickel-plated brass pin with solder connection. Flexible, shatter-proof insulated sleeve. For making up connecting leads with a maximum external diameter of 1.9 mm.
operating instruction	BA207
article-no. / *colour	9735091xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black             </div> <div style="text-align: center;">  01 red             </div> <div style="text-align: center;">  02 blue             </div> <div style="text-align: center;">  03 yellow             </div> <div style="text-align: center;">  04 green             </div> <div style="text-align: center;">  06 gray             </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; width: fit-content;">Ni</div>
drawing	
	
technical data	
connection	solder connection
rated voltage	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(2)</sup>
rated current (consider derating curve)	6 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010 <sup>(1)</sup>	-25 °C to +60 °C

<sup>(1)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(2)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 21.06.2022

stand: 21.06.2022

2 mm system